

Water filtration system, Model #OWF for commercial and industrial application. The unit consists of drive pump, 6 GPM capacity with 20 micron and 5 micron filters. System shuts down automatically on loss of water supply to prevent motor damage. Pump **reset** button is accessible *without* opening the cover. Unit comes with GFCI to prevent electrical shock. The cabinet is heavy-duty aluminum which is rustproof and durable.

Models:

OWF115 Water Filtration System, 6 GPM, 115 VAC, 1.6 amps

OWF230 Water Filtration System, 6 GPM, 230 VAC, 0.8 amps

Water Filtration Unit

SPECIFICATIONS

Net Weight With Filters 25 lbs.

Dimensions (LxWxH) 23"x8"x15"

Filtration Stages 2

Filter, 20 micron 9 3/4 x 2 3/4

Filter, 5 micron 9 3/4 x 2 3/4

Housing..... Aluminum, riveted construction

Pump..... 6 gpm

Circuit Requirements (Volts/Hz)


Model # OWF115 115 VAC/60 Hz, 1.7 amps

Model # OWF230 230 VAC/50-60 Hz, 0.7 amps

Pump Protection Vacuum switch with reset button

Electrical Protection..... GFCI

Water Connections 3/4" male garden hose connection

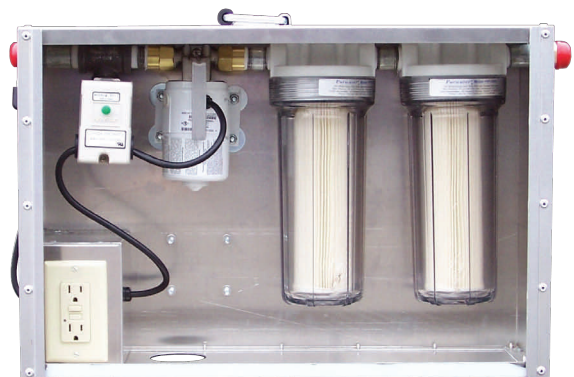

ORDERING INFORMATION PART

Water Filtration System - 115 volts..... OWF115

Water Filtration System - 230 volts..... OWF230

Filter, 20 micron, (Qty 2) OWF20

Filter, 5 micron, (Qty 2) OWF5

Water pump repair kit..... XHREPKIT

www.omnitecdesign.com

2125 196th Street SW, Suite 115, Lynnwood, WA 98036

phone 425-774-3257 fax 425-774-4983