



OmniAire 2000V

Omnitec Design, Manufacturing Air Purification Equipment Since 1988

Air scrubber for removal of toxic mold, asbestos and lead dust during renovation and abatement projects. Accessories include HEPA filter, activated carbon filters and germicidal UV-C light for removal of asbestos, lead, chemical fumes and biological contaminants. Provides cleaner and healthier environment at construction/renovation projects and industrial facilities.

OmniAire 2000V

SPECIFICATIONS


Net Weight With Filters	110 lbs.
Dimensions (LxWxH)	34"x20"x29"
Operating Speeds	Variable
Airflow Ratings (cfm)*	300 to 1900
Filtration Stages	3 to 5
HEPA Filter 99.97%, 0.3μ	Yes
Cabinetry	Aluminum, silicone sealed before riveting
Exhaust Collar Diameter	12"
Carrying Handles w/Rubber Grips	2
5" Casters	2 Fixed, 2 Swivel
Reinforced Caster Mounting Channels	Yes
Recessed Controls	Yes
Motor With Thermal Overload	1 hp
Circuit Requirements (Volts/Hz)	115V/60Hz
Maximum Operating Amps	12.0 amps
Pressure Gauge	0-5" W.C.

*Airflows based on blower manufacturer curves. Different HEPA filters may cause the flow to vary.




ORDERING INFO.....PART

OmniAire 2000V	OA2000V
HEPA Filter 99.97%, 0.3μ	OAH2418
Primary/Secondary Filter (qty 20)	OF2518
Intake Manifold, 14"	OAIM2000
Flexible Duct, 14" x 25'	OFD14
Quick Clamp, 12 to 14"	QCW14
Flexible Duct, 12" x 25'	OAD12
Carbon Vapor Trap Filter	OCVT2418
OdorGuard 600 Carbon Filter	OG2418
UVGI Germicidal Light Module	UVCM2000
UV-C Emitter Tube, 10 1/2" J	EUV105JD
Bag Filter Housing	HBF2000
Bag Filter, 95% ASHRAE	OBF9

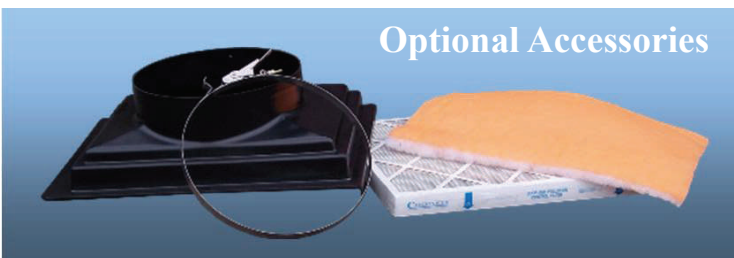

Optional Accessories

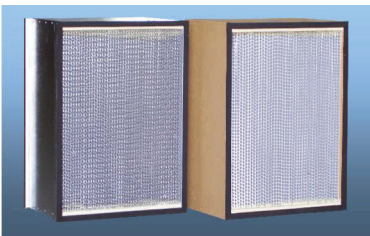

The OmniAire 2000V comes standard with a particle board 99.97% 0.3μ HEPA filter and can be upgraded to a metal frame 99.97% 0.3μ HEPA filter.



CONFORMS TO UL STD 507
CERTIFIED TO CAN/CSA STD
C22.2 NO. 113-M1984

3067108

www.omnitecdesign.com

2125 196th Street SW, Suite 115, Lynnwood, WA 98036
phone 425-774-3257 fax 425-774-4983