



# OmniAire 600V

Omnitec Design, Manufacturing Air Purification Equipment Since 1988


Air scrubber for removal of toxic mold, asbestos and lead dust during renovation and abatement projects. Accessories include HEPA filter, activated carbon filters and germicidal UV-C light for removal of asbestos, lead, chemical fumes and biological contaminants. Provides cleaner and healthier environment at construction/renovation projects and industrial facilities.

## OmniAire 600V

### SPECIFICATIONS

<b>Net Weight With Filters</b> .....	55 lbs.
<b>Dimensions (LxWxH)</b> .....	30.5"x14"x18.5"
<b>Operating Speeds</b> .....	Variable
<b>Airflow Ratings (cfm)*</b> .....	150 to 600
<b>Filtration Stages</b> .....	3 to 4
<b>HEPA Filter 99.97%, 0.3µ</b> .....	Yes
<b>Cabinetry</b> .....	Aluminum, silicone sealed before riveting
<b>Exhaust Collar Diameter</b> .....	8"
<b>Carrying Handles w/Rubber Grips</b> .....	2
<b>3" Casters</b> .....	4 Swivel
<b>Motor With Thermal Overload</b> .....	1/4 hp
<b>Circuit Requirements (Volts/Hz)</b> .....	115V/60Hz
<b>Maximum Operating Amps</b> .....	3.5 amps
<b>Pressure Gauge</b> .....	0-3" W.C.

\*Airflows based on blower manufacturer curves. Different HEPA filters may cause the flow to vary.

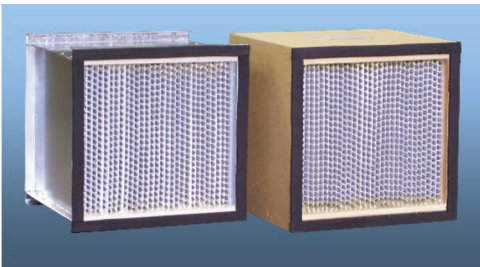

The OmniAire 600V comes standard with a particle board 99.97% 0.3µ HEPA filter and can be upgraded to a metal frame Certified 99.99% 0.3µ HEPA.



Optional Accessories

### ORDERING INFO.....PART #

OmniAire 600V.....	OA600V
HEPA Filter 99.97%, 0.3µ .....	MFH12
Primary/Secondary Filter (qty 20) .....	MFP1313
Intake Manifold, 8" .....	MFIM8
Quick Clamp, 8 to 10" .....	QCW12
Flexible Duct, 8" x 25' .....	MD8
OdorGuard 600 Carbon Filter .....	OG1212
UVGI Germicidal Light Module .....	UVC600
UV-C Emitter Tube, 6½" J .....	EUV65JD



CONFORMS TO UL STD 507  
 CERTIFIED TO CAN/CSA STD  
 C22.2 NO. 113-M1984

3067108

[www.omnitedesign.com](http://www.omnitedesign.com)

2125 196th Street SW, Suite 115, Lynnwood, WA 98036

phone 425-774-3257 fax 425-774-4983