



OmniAire 800V

Omnitec Design, Manufacturing Air Purification Equipment Since 1988

Air scrubber for removal of toxic mold, asbestos and lead dust during renovation and abatement projects. Accessories include HEPA filter, activated carbon filters and germicidal UV-C light for removal of asbestos, lead, chemical fumes and biological contaminants. Provides cleaner and healthier environment at construction/renovation projects and industrial facilities.

OmniAire 800V

SPECIFICATIONS


Net Weight With Filters	70 lbs.
Dimensions (LxWxH)	15"x15"x36"
Operating Speeds	Variable
Airflow Ratings (cfm)*	100 to 650
Filtration Stages	3 to 5
HEPA Filter 99.97%, 0.3µ	Yes
Cabinetry	Aluminum/Galvanized Steel/Epoxy Paint
Silicone Sealed Seams Before Riveting	Yes
Exhaust Collar Diameter	8"
Molded Polyurethane Handle	1
Wheels	2-3" Swivel Casters, 2-6" Wheels
Recessed Controls	Yes
Motor With Thermal Overload	1/3 hp
Circuit Requirements (Volts/Hz)	115V/60Hz
Maximum Operating Amps	3.5 amps
Pressure Gauge	0-3" W.C.

*Airflows based on blower manufacturer curves. Different HEPA filters may cause the flow to vary.



ORDERING INFO.....PART

OmniAire 800V	OA800V
HEPA Filter 99.97%, 0.3µ	MFH12
Primary/Secondary Filter (qty 20)	MFP1313
Intake Manifold, 8"	MFIM8
Quick Clamp, 8 to 10"	QCW12
Flexible Duct, 8" x 25'	MD8
OdorGuard 600 Carbon Filter	OG1212
UVGI Germicidal Light Module	UVCM
UV-C Emitter Tube, 6½" J	EUV65JD

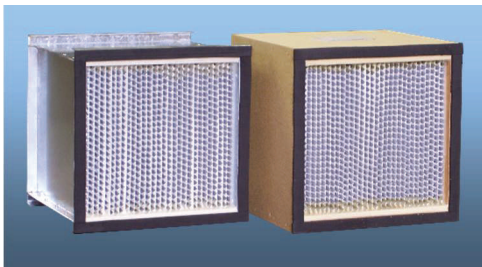

OmniAire 800V comes standard with a particle board 99.97% 0.3µ HEPA filter and can be upgraded to a metal frame Certified 99.99% 0.3µ HEPA.



Optional Accessories



CONFORMS TO UL STD 507
 CERTIFIED TO CAN/CSA STD
 C22.2 NO. 113-M1984

3067108

www.omnitecdesign.com

2125 196th Street SW, Suite 115, Lynnwood, WA 98036

phone 425-774-3257 fax 425-774-4983