



MiniForce II

Omnitec Design, Manufacturing Air Purification Equipment Since 1988

Air scrubber for removal of toxic mold, asbestos and lead dust during renovation and abatement projects. Accessories include HEPA filter and activated carbon filters for removal of asbestos, lead, chemical fumes and biological contaminants. Provides cleaner and healthier environment at construction/renovation projects and industrial facilities.

MiniForce II

SPECIFICATIONS


Net Weight With Filters	43 lbs.
Dimensions (LxWxH)	26.5"x14"x16"
Operating Speeds	2 Speed
Airflow Ratings (cfm)*	350 & 425
Filtration Stages	3 to 4
HEPA Filter 99.97%, 0.3µ	Yes
Cabinetry.....	Aluminum, silicone sealed before riveting
Exhaust Collar Diameter	8"
Carrying Handle w/Rubber Grips	1
3" Casters	4 Swivel
Motor With Thermal Overload	1/5 hp
Circuit Requirements (Volts/Hz)	115V/60Hz
Maximum Operating Amps.....	3.2 amps
Pressure Gauge	0-3" W.C.

*Airflows based on blower manufacturer curves. Different HEPA filters may cause the flow to vary.



ORDERING INFO.....PART

MiniForce II	MF100C
HEPA Filter 99.97%, 0.3µ	MFH12
Primary/Secondary Filter (qty 20)	MFP1313
Intake Manifold, 8"	MFIM8
Quick Clamp, 8 to 10"	QCW12
Flexible Duct, 8" x 25'	MD8
OdorGuard 600 Carbon Filter	OG1212

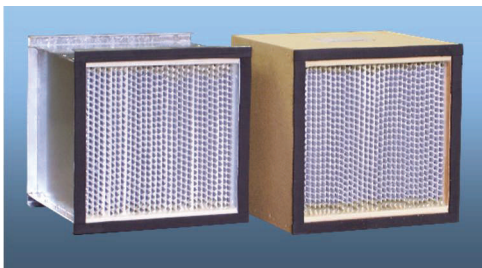

The MiniForce II comes standard with a particle board 99.97% 0.3µ HEPA filter and can be upgraded to a metal frame Certified 99.99% 0.3µ HEPA.



CONFORMS TO UL STD 507
CERTIFIED TO CAN/CSA STD
C22.2 NO. 113-M1984

3067108



Optional Accessories

www.omnitecdesign.com
2125 196th Street SW, Suite 115, Lynnwood, WA 98036
phone 425-774-3257 fax 425-774-4983